


ACI5/S1.5PO30-2M

miniaturized cylindrical
inductive



Indicative image

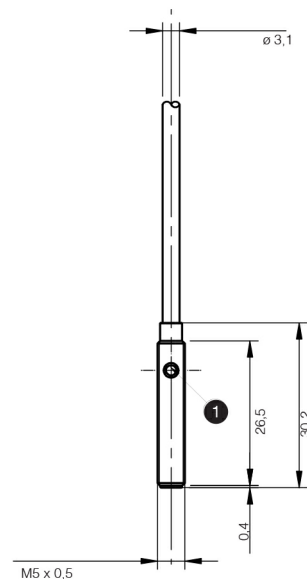

1 LED



Detection properties

Nominal sensing distance	1,5mm
Operanting distance	0...1,21mm
Standard target	4x4mm FE360
Correction Factor	copper: $0,33 \pm 10\%$ / aluminium: $0,27 \pm 10\%$ / brass: $0,34 \pm 10\%$ / stainless steel: $0,66 \pm 10\%$
Thermal drift of Sr	< 10%
Repeat Accuracy	5% (UB 24V Ta=23°C $\pm 5^\circ\text{C}$)
Hysteresis	1 ... 20%

Outputs

Output type	PNP
Output Function	NO
Switching frequency	5kHz

Electrical data

Operating Voltage	10...30Vdc
No-Load supply current	≤ 10mA
Load current	≤ 100mA
Leakage current	≤ 10μA
Output voltage drop	≤ 1,5V @100mA
Max ripple content	≤10%
LED indicators	Yellow LED output state
Time delay before availability	≤ 50ms
Short-circuit protection	Yes (auto-reset)
Reverse Polarity Protection	Yes
Protection against inductive loads	Yes

Mechanical data

Mounting	Shielded
Dimensions	M5 x 0,5 / L = 30,2mm
Weight	30g
Housing Material	AISI 303 Stainless Steel
Connections	2m PVC Cable
Active Head Material	PBT
Tightening torque	2Nm
Operating temperature	-25°C...+70°C
Diameter/Dimension	M5

Test/Approvals

Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

Accessories


Supplied Accessories	2 nuts M5x0,5
----------------------	---------------

ELECTRICAL DIAGRAMS OF THE CONNECTIONS



RESPONSE CURVES

Parallel offset

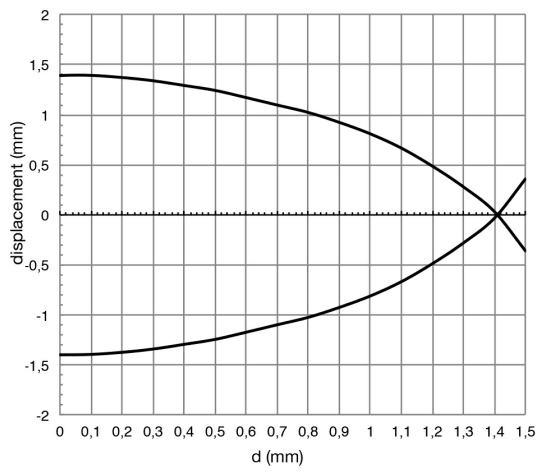

Automation Center

41901 Woodbrook Dr CANTON, MI 48188

Phone: +1 586 383 3130

Email: contact@automationcenter.us

Website: www.automationcenter.us