


ACI5/S1.5PO40-M8

miniaturized cylindrical
inductive



Indicative image

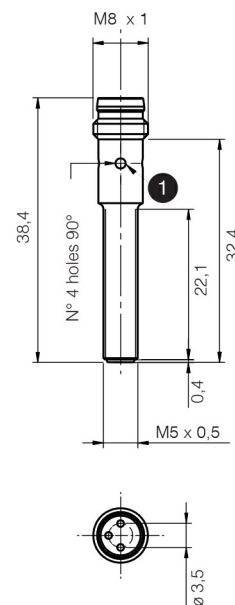

Detection properties

Nominal sensing distance	1,5mm
Operanting distance	0...1,21mm
Standard target	4x4mm FE360
Correction Factor	copper: $0,29 \pm 10\%$ / aluminium: $0,23 \pm 10\%$ / brass: $0,31 \pm 10\%$ / stainless steel: $0,66 \pm 10\%$
Thermal drift of Sr	< 10%
Repeat Accuracy	5% (UB 24V Ta=23°C $\pm 5^\circ\text{C}$)
Hysteresis	1 ... 20%

Outputs

Output type	PNP
Output Function	NO
Switching frequency	5kHz

Electrical data

Operating Voltage	10...30Vdc
No-Load supply current	$\leq 10\text{mA}$
Load current	$\leq 100\text{mA}$
Leakage current	$\leq 10\mu\text{A}$

Output voltage drop	≤ 1,5V @100mA
Max ripple content	≤10%
LED indicators	Yellow LED output state
Time delay before availability	≤ 50ms
Short-circuit protection	Yes (auto-reset)
Reverse Polarity Protection	Yes
Protection against inductive loads	Yes

Mechanical data

Mounting	Shielded
Dimensions	M5 x 0,5 / L = 38,4mm
Weight	4g
Housing Material	AISI 303 Stainless Steel
Connections	M8 Plug
Active Head Material	PBT
Tightening torque	2Nm
Operating temperature	-25°C...+70°C
Diameter/Dimension	M5


Test/Approvals

Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

Accessories

Supplied Accessories	2 nuts M5x0,5
----------------------	---------------


ELECTRICAL DIAGRAMS OF THE CONNECTIONS

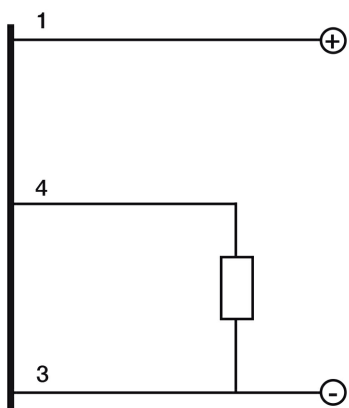

CONNECTOR




INSTALLATION

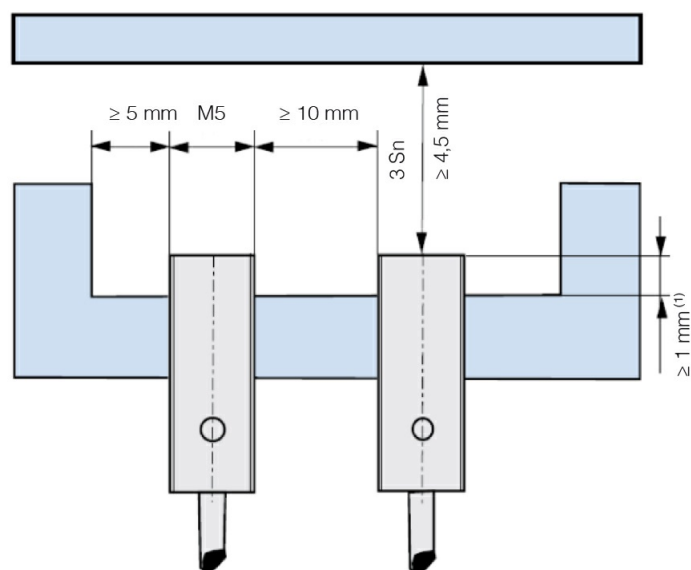

⁽¹⁾ $\geq 2 \text{ mm}$ without ferro-magnetic material

RESPONSE CURVES

Parallel offset

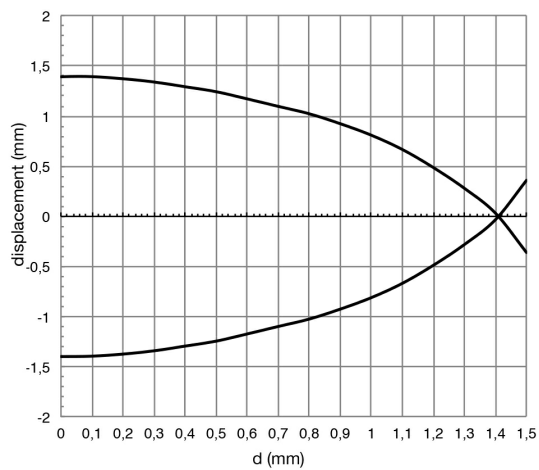

Automation Center

41901 Woodbrook Dr CANTON, MI 48188

Phone: +1 586 383 3130

Email: contact@automationcenter.us

Website: www.automationcenter.us